

LRST Series

Tank Mounted Direct Drive Compressor

In-Built VFD | Permanent Magnet Technology | Energy Saving



The Air of Trust

Anest Iwata Inspiring History

2022
"ARID"
Air Dryer Launched



2018



teg in Greater Noida (India)

V
a
c
u
u
m

P
u
m
p

L
a
u
n
c
h
e
d

i
n

I
n
d
i
a

2
0
1
0
S

e
c
o
n
d

F
a
c
i
l
i
t
y

I
n
a
u
g
u
r
a

Affordable High Efficiency Compressed Air is here!

Introducing AIM's latest range of Permanent Magnet Screw Compressors.

The LRST range is the perfect choice for small to medium air users who have a variable air demand or who would like an energy-efficient machine that can match their demand as air usage increases. The LRST range now makes variable-speed energy-saving technology affordable to even the smallest user, where previously it was only a viable option for large air users.



Affordable energy savings

The unique design of the LRST machine bridges the gap between air users that have outgrown a piston compressor but cannot justify the cost of a new variable speed screw compressor. The oil-cooled IE4 'Super Premium Efficiency Permanent Magnet Motor' added with an inbuilt variable speed drive is the most cost-effective & energy-efficient air compressor available to you.

Unique advantages of the LRST series:

Low noise operation

Maximum energy savings

Oil cooled IP65 PM motor

Bearing free motor design

1:1 direct drive

Wide operating speed

Automatic start-stop scheduling

Low component count

Solid seamless steel pipes

Air receiver with segregated oil tank

Easy to service and maintain

Pure soft start control

LRST Features and Benefits

High efficiency airend

- Large oversized rotors increase efficiency by 60%
- Low rotational speed leads to reduced wear
- Triple lip shaft seals ensure leak-free operation




Permanent magnet motor

- IE4 PM Motor offers the highest level of efficiency
- IP65 sealed motor prevents dust ingress
- Oil cooled motor ensures adequate cooling even in the harshest of environments
- Bearing free design means no bearing maintenance

Direct coupled motor & airend

- 1:1 Direct Drive means no belt to maintain
- No gearbox or transmission losses
- Reduced noise over belt driven machines




Easy access for maintenance

The Simple design means that all internal components are easily accessible

- Solid seamless steel pipework eliminates the risk of perished hoses
- Low component count increases reliability and service cost
- No drive belt maintenance

Low noise operation


- The PM motor and VSD lead to low noise operation
- Ideal for installing in the workplace
- Direct Drive reduces transmission noise levels

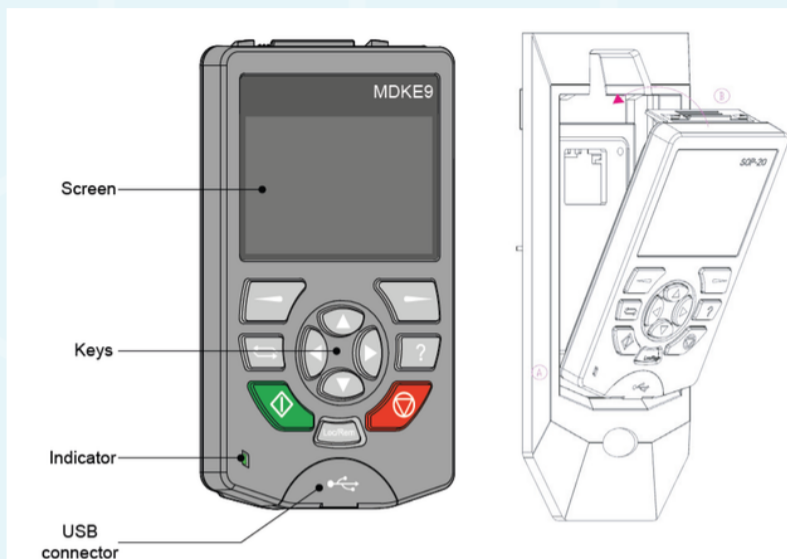

User friendly controller

- Full-text user-friendly controller
- Plain text simplifies menu navigation
- Dedicated compressor software imbedded into the VSD simplifies commissioning, settings, and maintenance timers
- Ability to schedule start and stop times reduces energy through reduced running hours Unique
- removable ethernet cable connected controller. A controller can easily be relocated outside the machinery room.

Product description

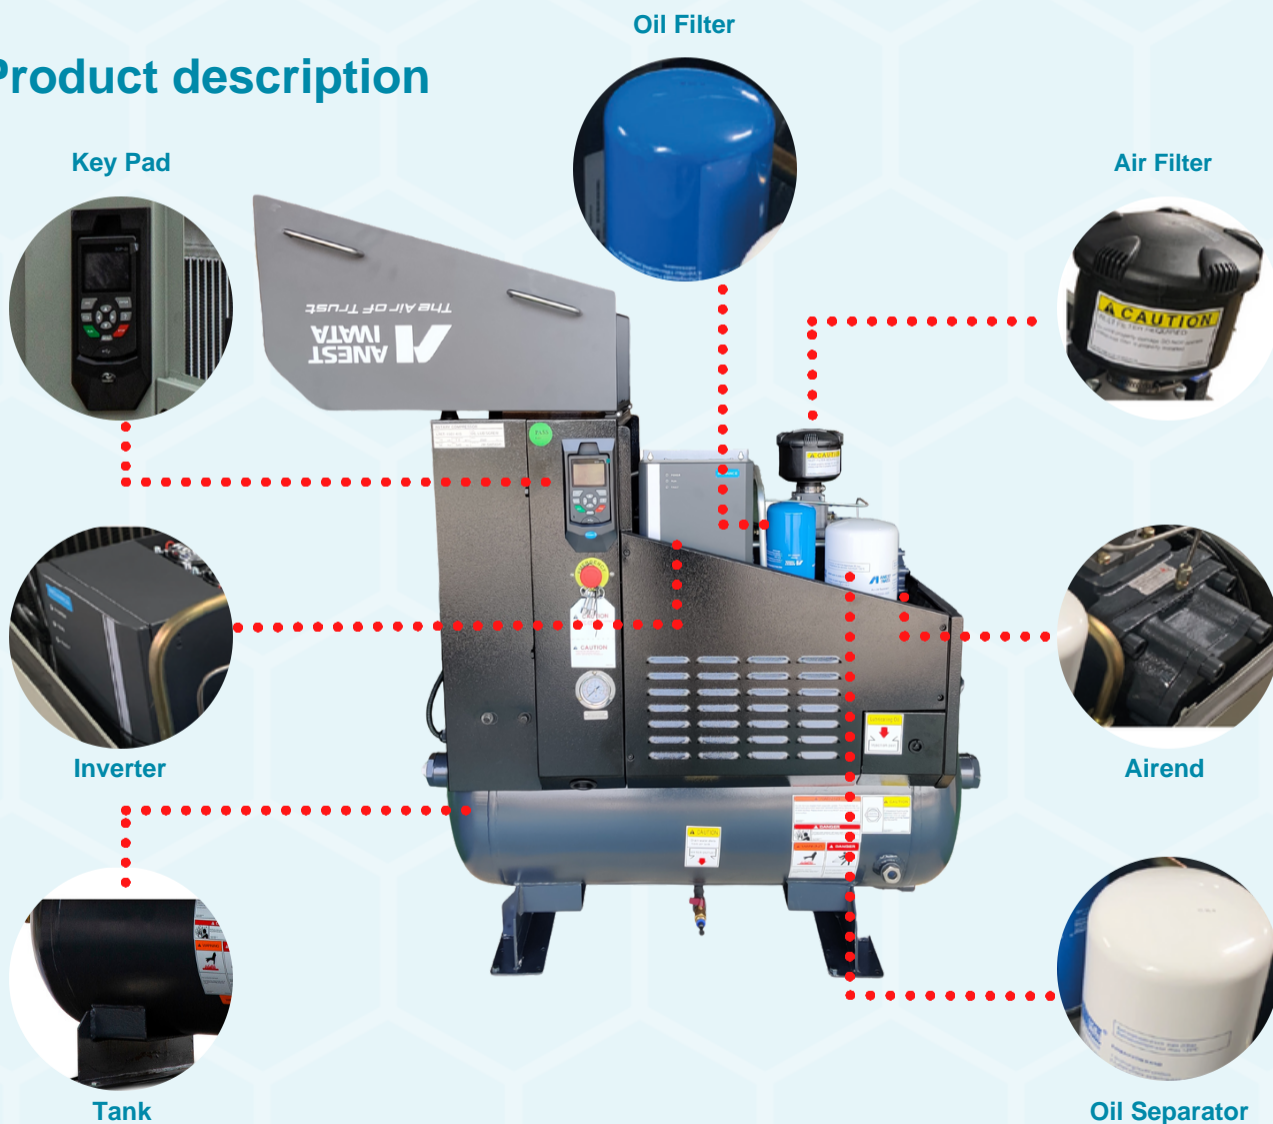

Unique patented air receiver and oil tank



- A unique labyrinth structure enables a small section of the receiver to be used as an oil tank, reducing manufacturing costs
- This design also reduces the machine size, weight, and footprint

Small, Compact and Flexible

The unique design of the LRST compressor makes it ideal for workplace installations, where space availability is a constraint.

- The flip-top design offers easy access to consumable parts from the front
- No need for rear machine access
- Can be located close to a back and sidewall
- No rear ventilation airflow required

Technical Specifications

Model	kW	HP	Capacity (m ³ /min)	Capacity (CFM)	Pressure (Bar)	Noise Level (dB)	Dimensions (mm)	Tank Size (ltr)	Outlet size (Inch)	Weight (kg)
LRST-7503-415	0	0	0.41 - 1.1	14-39	8	0	0	0	0	0
LRST-7501-415	7.5	10	0.35 - 0.95	12-34	10	67	1197 x 500 x 1125	130	RC 1/2	280
LRST-1103-415	0	0	0.69 - 1.70	24-60	8	0	0	0	0	0
LRST-1101-415	11	15	0.6 - 1.5	21-53	10	68	1197 x 605 x 1220	130	RC 1/2	320
LRST-1503-415	0	0	0.92 - 2.3	32-81	8	0	0	0	0	0
LRST-1501-415	15	20	0.8 - 2.0	28-70	10	69	1197 x 605 x 1220	130	RC 3/4	340

Note :

- Standard Voltage is 415V/50Hz
- Free Air Delivery (m³/min / cfm) is measured as per ISO 1217: 2009 - Annex C
- Mean noise level measured at a distance of 1 m according to ISO 2151: 2004 using ISO 9614/2 (sound intensity method); tolerance ±3 dB(A)
- All performance parameters are as per JIS (Japanese Industrial Standards)
- Standalone Refrigerated Air Dryers, Heatless Air Dryers, Oil Removal Filters, and Auto Drain Valves are also available upon request
- Specifications may change without prior notice



Engineering0 Capabilities &0 Customised0 Solutions.

We at Anest Iwata Motherson (AIM) are committed to delighting our customers. Our state-of-the-art Air Energy Core Technology Centre located in Yokohama, Japan works relentlessly on innovations and technologies that add value to our products and make us ready to serve our customer's future needs. It is our customer's trust in us that we have developed many "World's First" products.

Always Ahead with Anest Iwata!

**Innovation
driven0
World's 1st
products**



**Oil Free Reciprocating
Compressor**



**Oil Free Scroll
Compressor**



**Oil Free Booster
Compressor**



**Oil Free Scroll
Vacuum Pump**

Anest Iwata
Australia Pty.
Ltd.



Reciprocating



Screw




Scroll



Claw

Compressed Air Solutions in all Technologies

Active with Newest Technology

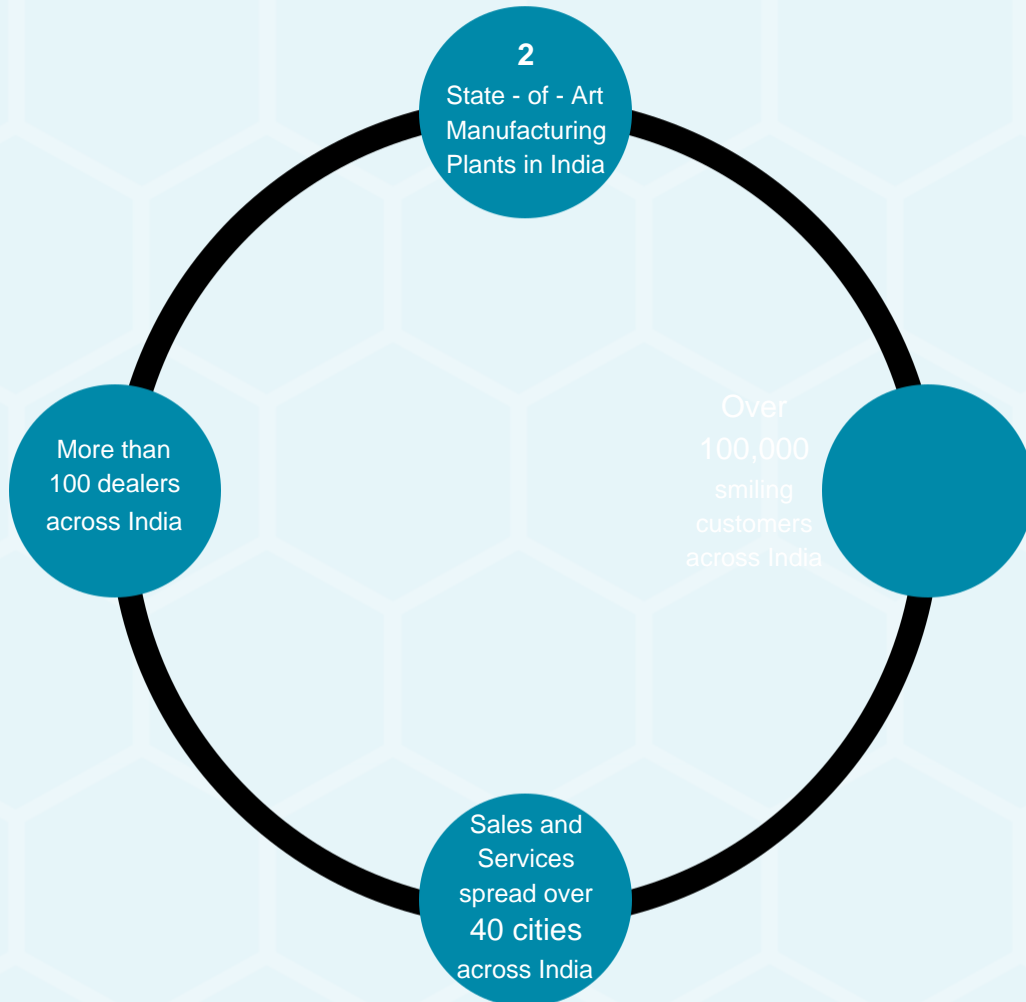

Anest Iwata Motherson Pvt. Ltd.
CFT Solution-Plot n.356, Phase-II
Dhanwanpur Road Gurgaon-122001
Haryana (INDIA)
Email: ggn.anestiwata@outlook.com



ISO-9001

For any details reach us at:

Mobile No : +91 8285795828
+91 9891829797

AUTHORISED CHANNEL PARTNER

